


ZX70-EX FULLY RUGGED TABLET



- Qualcomm® Snapdragon™ 660, Octa-core Processor
- Verified as Android enterprise recommended ⁱ
- 7" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader
- ATEX & IECEx explosive atmosphere certified



ZX70-EX 3D demo

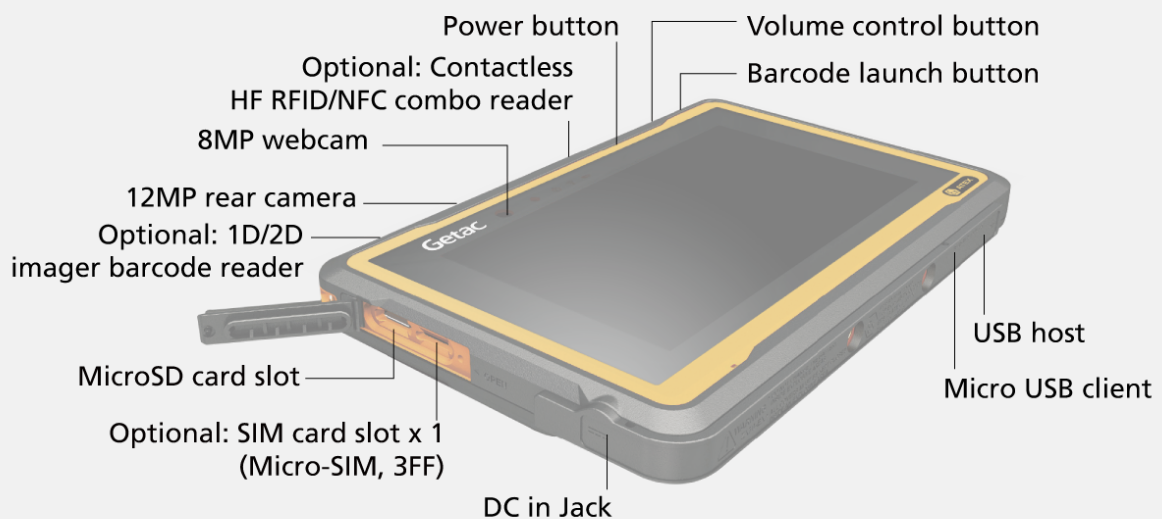

SPECIFICATIONS

Generation

G2

Operating System

Android™ 10.0

Mobile Computing Platform

Qualcomm® Snapdragon™ 660,
Octa-core 1.95GHz Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

7" Wide Viewing Angle TFT LCD HD (1280 x 720)

Anti-static protection film

LumiBond display with Getac sunlight readable technology

Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4

64GB eMMC

Keyboard

Power button

3 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

Expansion Slot

Optional: 1D/2D imager barcode reader

I/O Interface

8M pixels webcam x 1

12M pixels autofocus rear camera x 1

DC in Jack x 1

USB 2.0 (Host) x 1

MicroUSB 2.0 (Client) x 1

MicroSD x 1

Optional: SIM card slot x 1 (Micro-SIM, 3FF) ⁱⁱⁱ

Communication Interface

Wi-Fi 802.11ac

Bluetooth (v5.0) ⁱⁱ

Dedicated GPS

Optional: 4G LTE mobile broadband ⁱⁱⁱ

Security Feature

Optional: HF RFID/NFC combo reader ^{iv,v}

Power

AC adapter (25W, 100-240VAC, 50/60Hz)

Li-ion battery (3.8V, typical 8480mAh;

min. 8220mAh)

Dimension (W x D x H) & Weight

218 x 142 x 27mm (8.58" x 5.6" x 1.08")

774g (1.71lbs) ^{vi}

Rugged Feature

MIL-STD-810H certified

IP67 certified

Vibration & 6ft (1.8m) drop resistant ^{vii}

ATEX & IECEx certified

Environmental Specification

Temperature ^{viii}:

- Operating: -21°C to 60°C / -6°F to 140°F

- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22

Ex II 3G Ex ic op is IIC T5 Gc

Ex II 3D Ex ic op is IIIB T100°C Dc

Pre-installed Software

Getac File Browser

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac deployXpress (trial version)

Getac settings and Google applications (Search, Chrome,

Gmail, Maps, YouTube, Play, Drive, YouTube music,

Play movies, Duo and photos)

Optional software

Getac Driving Safety Utility

Getac deployXpress

Getac OEMConfig

Accessories

AC adapter (25W; 12V/2A, 100-240VAC;

50/60Hz)

Capacitive stylus with tether

Pen holder

Wrist strap

Optional:

AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)

Capacitive stylus with tether

Hand strap with stylus holder

Wrist strap

Pen holder

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

ZX70-EX FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Units with 4G LTE option comes with an embedded SIM card slot.
- IV. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- V. HF RFID/NFC combo reader applies to US & EU.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.