


## ZX10-IP FULLY RUGGED TABLET



- Qualcomm® Snapdragon™ 660, Octa-core Processor
- Durable rubber buttons ensure easy cleaning to support infection prevention of medical healthcare professionals
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP66 certified
- Verified as Android enterprise recommended <sup>vi</sup>

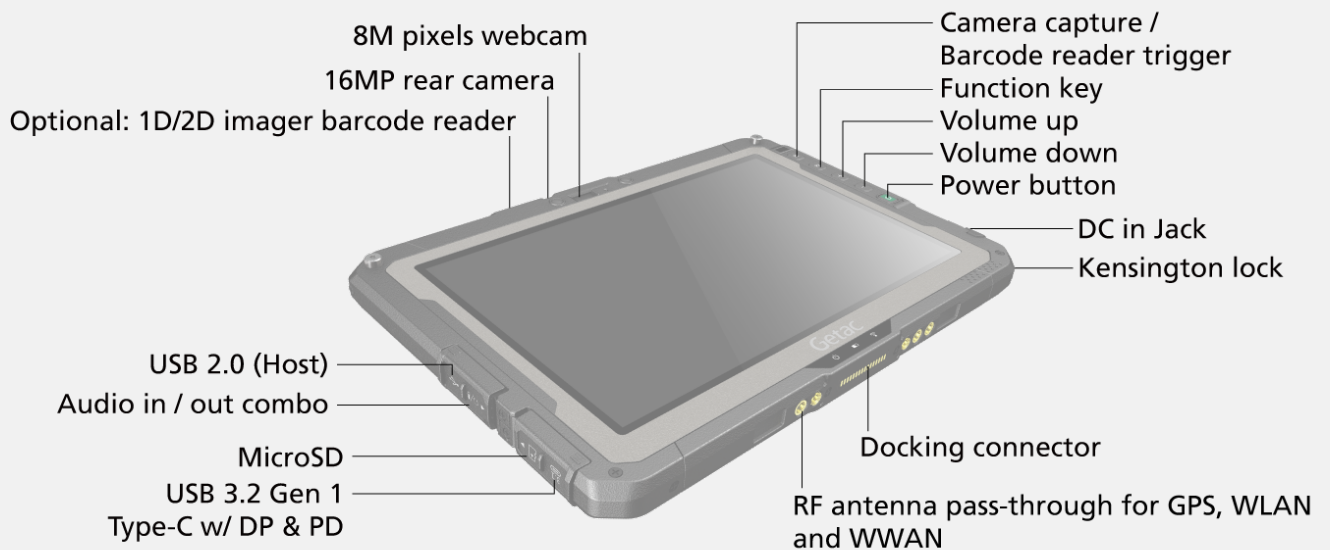

## SPECIFICATIONS

### Generation

G1

### Operating System

Android™ 12.0

### Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core  
1.95GHz Max. 2.2GHz

### VGA Controller

Qualcomm® Adreno™ 512 GPU

### Display

10.1" TFT LCD WUXGA (1920 x 1200)  
>Protection film  
800 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

### Storage & Memory

4GB LPDDR4, 64GB eMMC  
Optional: 6GB LPDDR4, 128GB eMMC

### Keyboard

Power button  
4 tablet programmable buttons

### Pointing Device

Touchscreen  
- Capacitive multi-touch screen

### Expansion Slot

Optional: 1D/2D imager barcode reader  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader<sup>1</sup>

### I/O Interface

8M pixels webcam x 1  
16M pixels auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 1 Type-C w/ DP & PD x 1  
USB 2.0 (Host) x 1  
MicroSD x 1  
Docking connector x 1  
RF antenna pass-through for GPS and WWAN

### Communication Interface

Wi-Fi 802.11 ac  
Bluetooth (v5.0)<sup>ii</sup>  
Dedicated GPS  
4G LTE mobile broadband<sup>vii</sup>  
Dual Micro SIM<sup>viii</sup>

### Security Feature

Kensington lock  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader<sup>1</sup>

### Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery(3.84V, typical 4990mAh; min. 4870mAh)x 2  
LifeSupport battery swappable technology

### Dimension (W x D x H) & Weigh

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")  
1.04kg (2.29lbs)<sup>iii</sup>

### Rugged Feature

MIL-STD-810H certified  
IP66 certified  
Vibration & 6 feet (1.8m) drop resistant

### Environmental Specification

Temperature<sup>iv</sup>:  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

### Pre-installed Software

Getac Camera  
Getac Input Method  
Getac Driving Safety Utility (trial version)  
Getac deployXpress (trial version)  
Getac settings and Google applications  
(Search, Chrome, Gmail, Maps, YouTube, Play,  
Drive, YouTube music, Google TV, Duo and photos)  
Getac enrollXpress

### Optional software

Getac Driving Safety Utility  
Getac deployXpress  
Getac OEMConfig

### Accessories

Battery (3.84V, typical 4990mAh; min. 4870mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Capacitive stylus with tether  
Hard handle

### Optional:

Carry bag  
Battery  
(3.84V, typical 4990mAh; min. 4870mAh)  
High capacity Li-ion battery  
(3.84V, typical 9980mAh; min. 9470mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Office dock AC adapter (65W, 100-240VAC)  
DC-DC vehicle adapter (120W, 22-32VDC)  
Capacitive stylus with tether  
Protection film  
Rubber hand strap  
Vehicle dock<sup>v</sup>  
Office dock  
100W Type-C adapter  
Hard handle

### Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

### Standard

3 anni Bumper-to-Bumper

# ZX10-IP FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Gamber Johnson and Havis vehicle docks are e-mark certified.
- VI. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- VII. Units with 4G LTE option come with two embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

### Office Dock (Pogo)

	Office Dock (Pogo)
Serial Port	-
Microphone	1
Audio Output	1
DC in Jack	1
USB	USB 2.0 x 3
LAN	1
HDMI	1
RF Pass-through	-
Kensington Lock	1

# Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,  
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)  
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2023 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only, available specification shall be subjected to  
quotation by request.