




ANS

# ZX70 FULLY **RUGGED TABLET**

- Qualcomm<sup>®</sup> Snapdragon<sup>™</sup> 660, Octa-core Processor .
- Verified as Android enterprise recommended <sup>i</sup>
- 7" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader



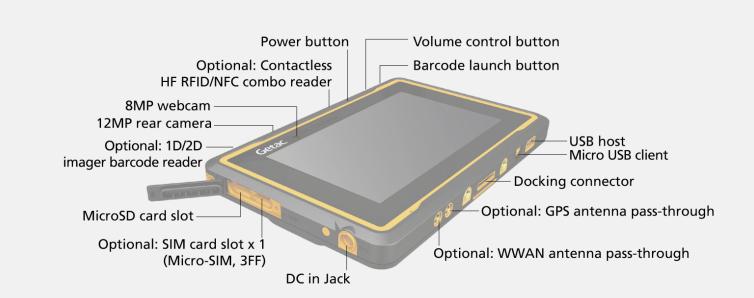

### **SPECIFICATIONS**

#### Generation

**Operating System** Android™ 10.0

Mobile Computing Platform Qualcomm<sup>®</sup> Snapdragon<sup>™</sup> 660, Octa-core 1.95GHz Max. 2.2GHz

VGA Controller Qualcomm<sup>®</sup> Adreno<sup>™</sup> 512 GPU

Display 7" Wide Viewing Angle TFT LCD HD (1280 x 720) Protection film LumiBond display with Getac sunlight readable technology Capacitive multi-touch screen

### Storage & Memory

4GB LPDDR4 64GB eMMC

### Keyboard

Power button 3 tablet programmable buttons Pointing Device

### Touchscreen - Capacitive multi-touch screen

**Expansion Slot** 

### Optional: 1D/2D imager barcode reader

I/O Interface I/O Interface 8M pixels webcam x 1 12M pixels autofocus rear camera x 1 DC in Jack x 1 USB 2.0 (Host) x 1 MicroUSB 2.0 (Client) x 1 MicroSD x 1 Docking connector (Pogo/JAE) x 1 Optional: SIM card slot x 1 (Micro-SIM, 3FF) <sup>iii</sup> Optional: SIF antenna pass-through for GPS and WWAN

### **Communication Interface**

Wi-Fi 802.11ac Bluetooth (v5.0) <sup>II</sup> Dedicated GPS Optional: 4G LTE mobile broadband <sup>III</sup> Security Feature

Optional: HF RFID/NFC combo reader <sup>iv, v</sup> Power

## AC adapter (25W, 100-240VAC, 50/60Hz) Li-ion battery (3.8V, typical 8480mAh; min. 8220mAh)

Dimension (W x D x H) & Weight

### 218 x 142 x 27mm (8.58" x 5.6" x 1.08") 762g (1.68lbs) <sup>vi</sup>

**Rugged Feature** 

## MIL-STD-810H certified IP67 certified Vibration & Manp; 6ft (1.8m) drop resistant <sup>vii</sup> Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)

**Environmental Specification** 

### Temperature <sup>viii</sup>: - Operating: -21°C to 60°C / -6°F to 140°F - Storage: -40°C to 71°C / -40°F to 160°F

Humidity: - 95% RH, non-condensing

### Pre-installed Software

Connector

Pre-installed Software Getac Camera Getac Camera Getac Input Method Getac Driving Safety Utility (trial version) Getac deployXpress (trial version) Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Play movies, Duo and photos)

### **Optional software**

Getac Driving Safety Utility Getac deployXpress Getac OEMConfig Accessories

### AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz) Capacitive stylus with tether Pen holder Wrist strap

### **Optional:**

Optional: Carry bag AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz) Office dock AC adapter (60W, 110-240VAC) DC-DC vehicle adapter (120W, 11-32VDC) Capacitive stylus with tether Protection film Shoulder strap (2-point) Wrist strap Rotating hand strap with kickstand and stylus holder Vehicle cradle " USB to RS232 converter cable Docking connector to HDMI converter cable Vehicle dock " Office dock Pen holder

### Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days. downtime

**Standard** 3 years Bumper-to-Bumper

## ZX70 FULLY **RUGGED TABLET**

- Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC. I.
- Android are trademarks of Google LLC. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. II.
- Units with 4G LTE option comes with an embedded SIM card slot. III.
- 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa<sup>™</sup> compliant). HF RFID/NFC combo reader applies to US & EU. Weight and dimensions vary from configurations and optional accessories IV. V
- VI.
- optional accessories. Drop test results vary from configurations and optional VII. accessories.
- Tested by an independent third-party test lab following MIL-STD-810H. VIII.
- IX. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Getac-made Vehicle Dock (JAE)	Havis Vehicle Dock (Pogo,power only)	Vehicle Dock	Johnson Charging Cradle (Pogo)	Havis Vehicle Dock (Pogo)	(JAE)	(Pogo)
Serial Port	1	-	1	-	1	-	-
Speaker	1	-	-	-	-	-	-
Audio Output	1	1	1	-	1	1	1
DC in Jack	1	1	1	1	1	1	1
USB	USB Host x 2	-	USB2.0 x2	-	USB2.0 x2	USB Host x 2, MicroUSB Client x 1	USB Host x 2
LAN	1	-	1	-	1	1	1
HDMI	1	-	1	-	-	1	-
RF Antenna	(WWAN GPS)	(WWAN GPS)	(WWAN GPS)	-	(WWAN GPS)	-	-



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel : +44 (0) 1952 207 222 Sales-Getac-UK@getac.com www.getac.com/en/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.