


ZX80 FULLY RUGGED TABLET



- Processeur 8 cœurs Qualcomm® QCS6490
- Écran LumiBond FHD de 8 pouces avec technologie Getac de lecture en plein soleil (1 000 nits) et écran tactile capacitif
- Batterie remplaçable à chaud pour un fonctionnement ininterrompu sur le terrain
- Certification MIL-STD-810H et IP67, avec résistance aux chutes de 1,8 m (6 pi)
- Plusieurs configurations avec des outils de gestion de niveau entreprise dans un facteur de forme fin et léger
- Vérifié comme Android entreprise recommended¹

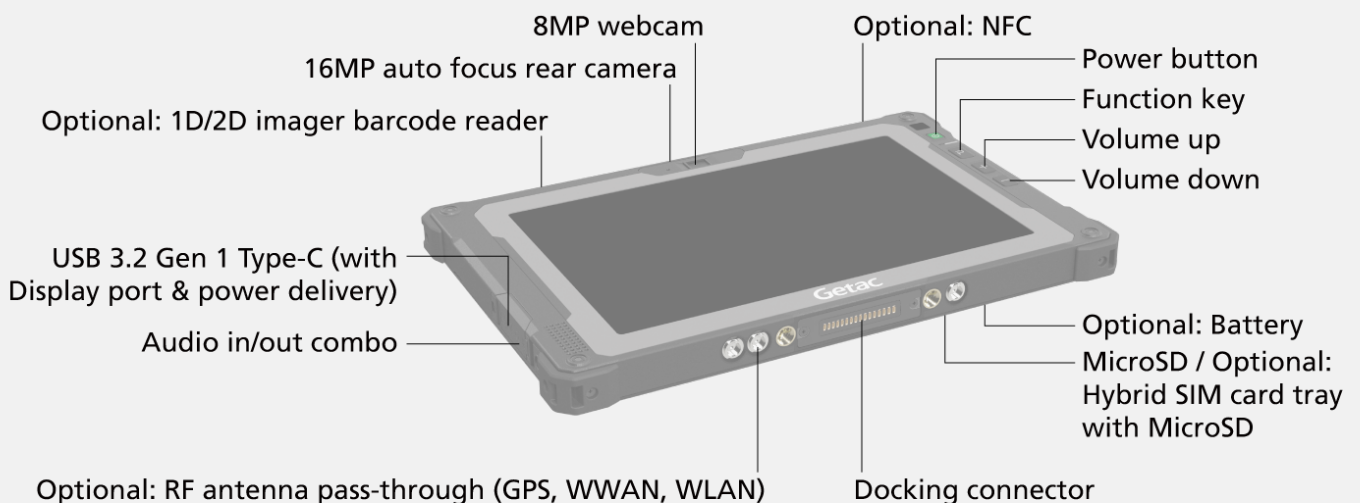

SPECIFICATIONS

Generation

G1

Operating System

Android™ 13.0

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

VGA Controller

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac sunlight readable
technology
Capacitive multi-touch screen

Storage & Memory

12GB LPDDR5, 256GB UFS

Keyboard

Power button
3 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: NFC ⁱⁱ

I/O Interface

8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
USB 3.2 Gen 1 Type-C (with Display port & power delivery) x 1
MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 2FF)
tray with MicroSD x 1 ⁱⁱⁱ
Docking connector x 1
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

Wi-Fi 6E 802.11ax
Bluetooth (v5.2) ^{iv}
Optional: Dual SIM (Nano-SIM 2FF and e-SIM) ⁱⁱⁱ
Optional: 4G LTE mobile broadband ⁱⁱⁱ
Optional: 5G Sub-6 ⁱⁱⁱ
Optional: Dedicate GPS ^v

Security Feature

Optional: NFC ⁱⁱ

Power

Internal battery (3.86V, typical 4060mAh; min. 3950mAh)
LifeSupport battery swappable technology

Swappable Battery Options:

Battery bay cover (Default)
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery
(3.84V, typical 9980mAh; min. 9470mAh)

Dimension (W x D x H) & Weight

234 x 149.8 x 17.6mm (9.21" x 5.89" x 0.69")
590g (1.3lbs) ^{vi}

Rugged Feature

MIL-STD-810H certified
IP67 certified
Vibration & 6ft (1.8m) drop resistant ^{vii}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{viii}

Environmental Specification

Temperature ^{ix}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version) agent/SDK
Getac settings and Google applications (Search, Chrome,
Gmail, Maps, YouTube, Play, Drive, YouTube music,
Google TV, Duo and photos)
Getac Log Tool
GDMS (trial version) agent/SDK

Optional software

Getac Driving Safety Utility
Getac OEMConfig

Accessories

Optional:

Carry bag
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery
(3.84V, typical 9980mAh; min. 9470mAh)
DC-DC vehicle adapter (65W, 11-32VDC)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hand strap with stylus holder
Rotating hand strap with kickstand
Shoulder strap (2-point)
Vehicle cradle ^x
Vehicle dock ^x
Office dock
65W USB-C AC Adapter

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier lorsque les produits sont soumis à des conditions difficiles, et peuvent engendrer une mise hors service des équipements et des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

3 ans Bumper-to-Bumper

ZX80 FULLY RUGGED TABLET

- I. Certified by June 2024. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Gamber-Johnson vehicle dock and cradle are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock (Gamber-Johnson)	Vehicle Dock (RAM Mounts)
Serial Port	1	-
Audio In/Out Combo	-	-
DC in Jack	-	-
USB	USB 2.0 x 2	USB 2.0 x 2
LAN	1	1
HDMI	-	-
RF Antenna Connector	3 (option) (WWAN, WLAN, GPS)	-
Kensington Lock	-	-

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2024 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.