




S410 RUGGED LAPTOP

- 11th Generation Intel[®] Core[™] i7 / i5 vPro[®] Processor
- Optional Windows Hello face-authentication camera with IR sensor and fingerprint dual biometric authentication
- Thunderbolt[™] 4 brings lightning speed and performance
- Greater flexibility and I/O options
- Wider range of operating temperatures of -29°C ~ 63°C (-20°F ~ 145°F)



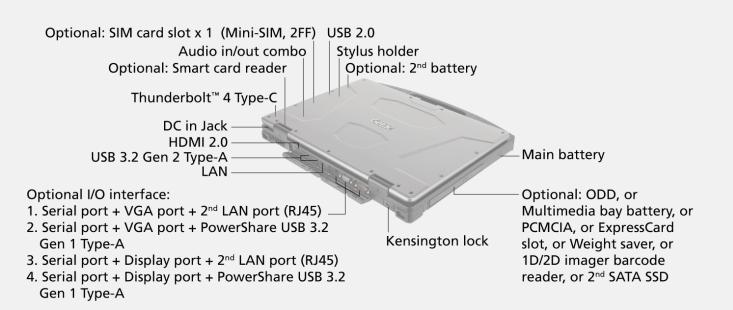

SPECIFICATIONS

Operating System Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i3-1115G4 Processor Max. 4.1GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache

Platform Options: Intel[®] Core[™] i5-1135G7 Processor Max, 4.2GHz with Intel[®] Turbo Boost Technology - 8MB Intel[®] Smart Cache

Intel® Core™ i5-1145G7 vPro® Processor Max. 4.4GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor Max. 4.7GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel[®] Core™ i7-1185G7 vPro[®] Processor Max. 4.8GHz with Intel[®] Turbo Boost Technology - 12MB Intel[®] Smart Cache

VGA Controller

Intel[®] Iris[®] X^e Graphics (i5/i7) ⁱ Intel[®] UHD Graphics (i3) Optional: NVIDIA[®] GeForce[®] GTX 1650 4GB discrete graphic controller ^{ii, iii, w}

Display

14" TFT LCD HD (1366 x 768)

14" TFT LCD HD (1366 x 768) Protection film 1,000 nits display with Getac sunlight readable technology Optional: 14" TFT LCD HD (1366 x 768) 1,000 nits display with Getac sunlight readable technology and capacitive multi-touch screen Optional: 14" Wide Viewing Angle TFT LCD FHD (1920 x 1080) 1,000 nits display with Getac sunlight readable technology Optional: 14" Wide Viewing Angle TFT LCD FHD (1920 x 1080) 1,000 nits display with Getac sunlight readable technology and capacitive multi-touch screen Storzage & Memory

Storage & Memory

8GB DDR4 Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD Optional: Multimedia bay 2nd storage: 256GB / 512GB / 1TB SATA SSD ^{III}

Keyboard

LED backlit membrane keyboard Pointing Device

Touchscreen - Optional: Capacitive multi-touch screen Touchpad - Glide touchpad with multi-touch

Expansion Slot

Optional: Smart card reader x 1

Multimedia Bay

Weight saver Optional: 1D/2D imager barcode reader ⁱⁱⁱ Optional: PCMCIA Type II ¹ Optional: ExpressCard/34 / 54 ^{iii, v, vi} Optional: DVD super multi drive ^{iii, vii} Optional: Bultimedia bay battery ^{iii, vii} Optional: Blu-Ray super multi drive ^{iii, vii} Optional: 2nd storage ^{iii, vii}

I/O Interface

A valie information of the second sec HDM12.0 X 1 Docking connector x 1 Optional: SMP pixels webcam x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{viii} Optional: Windows Hello face-authentication FHD camera (front-facing) x 1 ^{to} Optional: RF Antenna Pass-through for GPS, WWAN and WLAN Configurable L/O continues ^{vii} wwAN and WLAN **Configurable I/O options** ^{vi}: 1. Serial port (9-pin; D-sub) + VGA port (15-pin; D-sub) + 2nd LAN (RI45) (9-pin; D-sub) + VGA port (15-pin; D-sub) + PowerShare USB 3.2 Gen 1 Type-A 3. Serial port (9-pin; D-sub) + Display port + 2nd LAN (RI45) 4. Serial port (9-pin; D-sub) + Display port + 2nd

4. Serial port (9-pin; D-sub) + Display port + PowerShare USB 3.2 Gen 1 Type-A

Communication Interface

10/100/1000 base-T Ethernet In tay Judy and a set Function Intel[®] Wi-Fi 6 AX201, 802.11ax Bluetooth (v5.2) ^x Optional: Dedicated GPS ^{xi} Optional: 4G LTE mobile broadband with integrated GPS ^{xi, xii} Security Feature

TPM 2.0

Print 2.0 Check Constraints of the constraint o

Power

AC adapter (90W, 100-240VAC, 50/60Hz) Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) Optional: AC adapter (120W, 100-240VAC, 50/60Hz) " Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 3880mAh) " Optional: 2nd battery (10.8V, typical 6900mAh; min. 6600mAh)

Dimension (W x D x H) & Weight

350 x 293 x 38.5mm (13.8" x 11.5" x 1.5") 2.38kg (5.25lbs) ^{xiii}

Rugged Feature

MIL-STD-810H certified IP53 certified Splash resistant keyboard Vibration & amp; 3ft (0.9m) drop resistant ^{xiv} Sealed ports and connectors Shock-protected removable SSD

Environmental Specification

Temperature ^{xv} : - Operating: -29°C to 63°C / -20°F to 145°F ^{xvi} - Storage: -51°C to 71°C / -60°F to 160°F Humidity: - 95% RH, non-condensing

Pre-installed Software

Getac Utility Getac Geolocation Getac Barcode Manager ^{xvii} Optional: Absolute Persistence[®] **Optional software**

Getac Driving Safety Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility ^{xviii}

Accessories

Battery (10.8V, typical 6900mAh; min, 6600mAh) AC adapter (90W, 100-240VAC, 50/60Hz) Capacitive stylus with tether

Optional:

- Optional: Carry bag Battery (10.8V, typical 6900mAh; min. 6600mAh) Multimedia ^{2nd} SSD ^{III} Multimedia bay battery (11.1V, typical 4200mAh; min. ^{2980mAh) ^{III}} Multimedia bay battery (kare 1, 1, 2, 3980mAh)ⁱⁱⁱ Multi-Bay charger (Dual-Bay) Multi-Bay charger (Eight-Bay) AC adapter (120W, 100-240VAC, 50/60Hz)ⁱⁱⁱ DC-DC vehicle adapter (120W, 11-32VDC) Capacitive stylus with tether Protection film Vehicle cradle.^{ixk} Vehicle cradle ^x Vehicle dock ^{xix}
- Office dock 100W Type-C adapter **

Warranty

Nothing says quality like a manufacturer standing behind their product. We' ve designed the notebook from the inside out to survive drops, shocks, spills, vibration and more. We' re confident in our quality and that's why it comes standard with the industry leading 3 years warranty. It's the peace-of-mind protection of knowing you' re covered.

Standard 3 years limited warranty

S410 RUGGED LAPTOP

- I.
- II.
- Units equipped with dual channel memory come with Intel[®] Iris[®] X^e Graphics. 120W AC adapter is used for office dock and for device configured with discrete graphics card. NVIDIA[®] GeForce[®] GTX 1650 4GB discrete graphics controller, PCMCIA, Blu-Ray, DVD super multi drive, Express card, Multimedia bay battery, 1D/2D imager barcode reader and 2nd storage are mutually exclusive options. NVIDIA[®] GeForce[®] GTX 1650 4GB discrete graphics controller is required to configure with Intel[®] Core[™] i5/i7 processor, Dual battery, FHD LCD display with capacitive multi-touch screen, and 120W AC adapter. Factory option. Not user swappable. III.
- IV.
- Factory option. Not user swappable.
- HF RFID reader and express card are mutually exclusive. VI. VII. Trained user swappable.
- VIII. Units with 4G LTE option comes with an embedded SIM card slot.
- SMP webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options. IX.
- mutually exclusive options. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCaTM compliant). Χ.
- XI
- XII.
- XIII. Weight and dimensions vary from configurations and optional accessories.
- XIV. Drop test results vary from configurations and optional accessories.
- Tested by an independent third-party test lab following MIL-STD-810H. XVI.
- For S410 optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XVII. Available when barcode reader option is selected. XVIII.Models require either embedded or standalone GPSmodule.
- XIX. Havis vehicle dock is e-mark certified.
- XX. Do not support the configurations with discrete
- graphics card. XXI. Support GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	USB 3.0 x 1 USB 2.0 x 3
LAN	1	1
HDMI 2.0	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 115018, Taiwan, R.O.C. Tel : +886 2 2785 7888 globalmarketing@getac.com | www.getac.com

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only.available specification shall be subjected to quotation by request.