




## ZX80-EX FULLY RUGGED TABLET

- ATEX & IECEx Zone 2/22 explosive atmosphere certified
- Qualcomm® QCS6490, Octa-core Processor
- 8" LumiBond display with Getac sunlight readable technology (1,000 nits)
- 6ft drop, MIL-STD-810H and IP67 certified
- Multiple configurations with enterprise-level management tools in a thin, light form factor
- Verified as Android enterprise recommended <sup>i</sup>

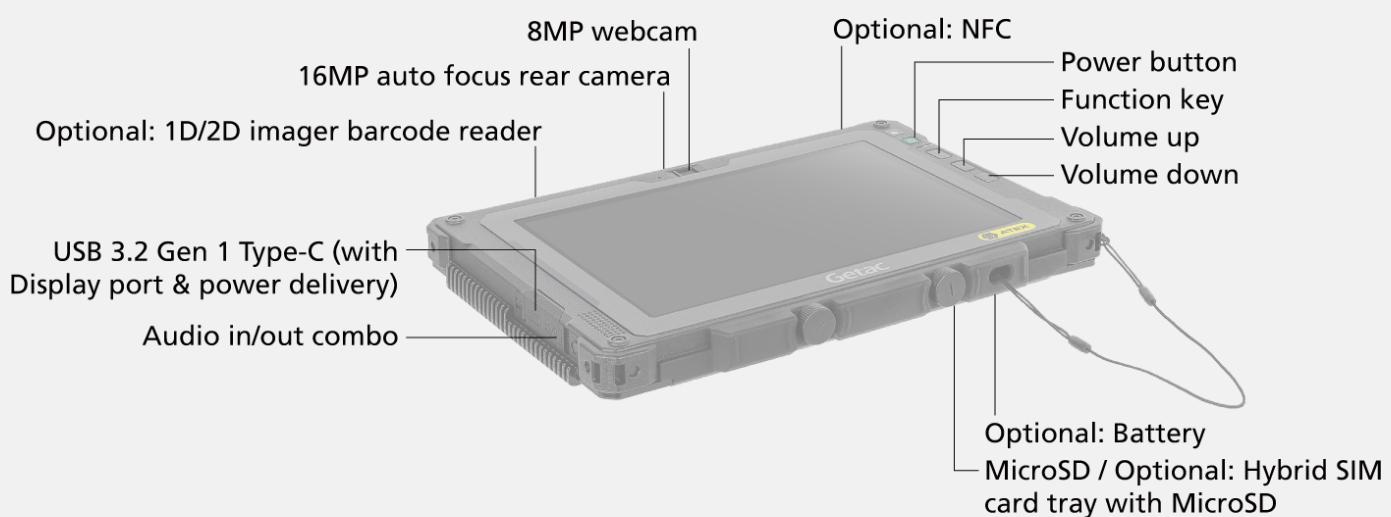

## SPECIFICATIONS

### Operating System

Android™ 15.0<sup>1</sup>

### Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

### Graphics

Qualcomm® Adreno™ 643 GPU

### NPU

Qualcomm® Hexagon™ Processor, up to 13 TOPS with 6th Qualcomm AI Engine

### Display

8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)

Anti-static protection film

1,000 nits LumiBond display with Getac sunlight readable

technology

Capacitive multi-touch screen

### Storage & Memory

12GB LPDDR5, 256GB UFS

### Keyboard

Power button

3 tablet programmable buttons

### Pointing Device

Touchscreen

- Dual mode touchscreen (multi-touch and digitizer)

### Audio

Integrated speaker

Integrated dual-array microphone

### Expansion Slot

Optional: 1D/2D imager barcode reader

Optional: NFC<sup>ii</sup>

### I/O Interface

8M pixels webcam x 1

16M pixels auto focus rear camera x 1

Audio in/out combo x 1

USB 3.2 Gen 1 Type-C (with Display port & power delivery) x 1

MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 2FF)

tray with MicroSD x 1<sup>iii</sup>

### Communication Interface

Wi-Fi 6E 802.11ax

Bluetooth (v5.2)<sup>v</sup>

Optional: Dual SIM (Nano-SIM 4FF and e-SIM)<sup>vi</sup>

Optional: 4G LTE mobile broadband<sup>vi</sup>

Optional: 5G Sub-6<sup>vi</sup>

Optional: Dedicated GPS<sup>v</sup>

### Security Feature

Optional: NFC<sup>ii</sup>

### Power

Internal battery (3.86V, typical 4060mAh; min. 3950mAh)

### Battery Options:

Battery bay cover (Default)

Battery (3.84V, typical 4990mAh; min. 4870mAh)

### Dimension (W x D x H) & Weight

243.2 x 165.1 x 23.1mm (9.57" x 6.50" x 0.90")

780g (1.72lbs)<sup>vi</sup>

### Rugged Feature

MIL-STD-810H certified

IP67 certified

Vibration & 6ft (1.8m) drop resistant<sup>vii</sup>

ATEX & IECEx certified

### Environmental Specification

Temperature<sup>viii</sup>:

- Operating: -21°C to 55°C / -5.8°F to 131°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

### Explosion Protection

ATEX/IECEx Zone 2/22

Ex II 3G Ex ic op is IIC T4 Gc

Ex II 3D Ex ic op is IIIIC T130°C Dc

### Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Meet and photos)

Getac Log Tool

Getac Diagnostic

Getac Monitoring (trial version) agent/SDK

Getac Management (trial version) agent/SDK

### Optional software

Getac Driving Safety Utility

Getac Monitoring

Getac Management

Getac OEMConfig

### Accessories

Digitizer pen

### Optional:

Battery (3.84V, typical 4990mAh; min. 4870mAh)

65W USB-C AC Adapter

65W USB-C Vehicle adapter

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

Digitizer pen with tether

Anti-static protection film

Hand strap with stylus holder

Rotating hand strap with kickstand

Shoulder strap (2-point)

Vehicle cradle

### Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

# ZX80-EX FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and Felica™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

# Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 115018, Taiwan, R.O.C. Tel : +886 2 2785

7888 globalmarketing@getac.com |

www.getac.com

Copyright © 2026 Getac Technology Corporation

and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.