


K120 FULLY RUGGED TABLET



- Processore Intel® Core™ i7 / i5 vPro™ di 13° generazione
- Display FHD da 12,5 pollici dotato di tecnologia Getac LumiBond® per la leggibilità alla luce diretta del sole (1200 nit) e touch screen capacitivo
- Sicurezza aziendale migliorata con le opzioni Intel vPro, TPM 2.0, Windows Hello face-authentication 5M camera e autenticazione multi-factor
- Multiuso semplificato da un'ampia selezione di accessori
- Tecnologia di sostituzione della batteria LifeSupport
- Thunderbolt™ 4 offre velocità e prestazioni straordinarie



K120 3D demo

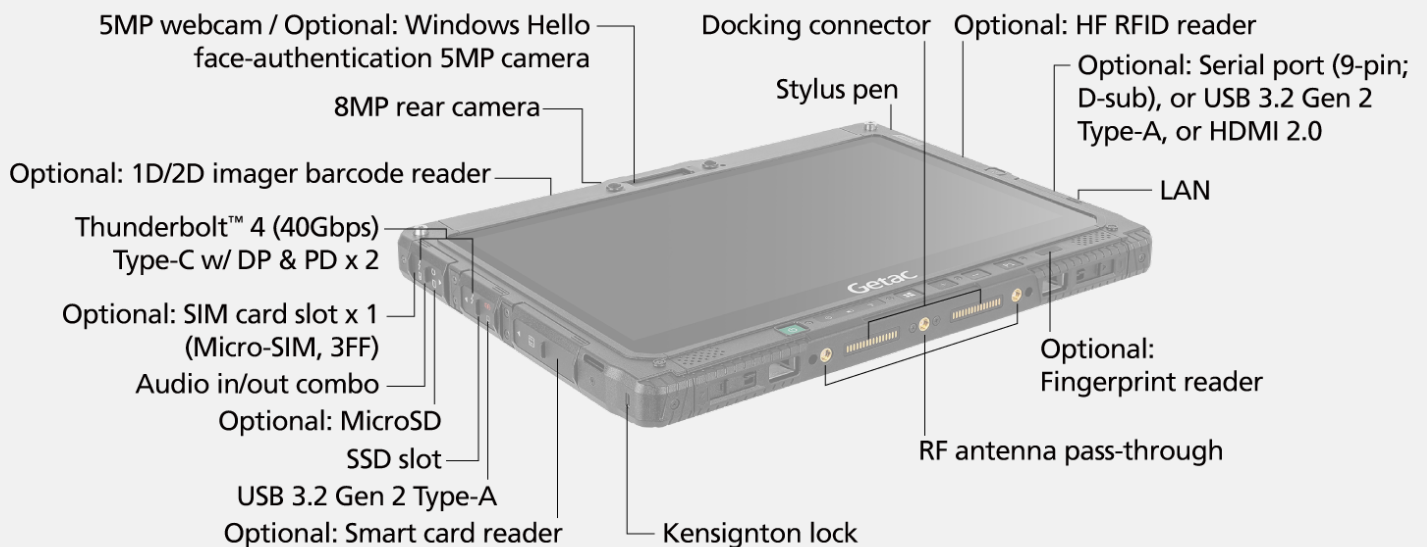

SPECIFICATIONS

Generation

G3

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1335U Processor
Max. 4.6GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1345U vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1355U Processor
Max. 5GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1365U vPro® Processor
Max. 5.2GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Graphics

Intel® Iris® X^e Graphicsⁱ

Display

12.5" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,200 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard
Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Serial port (9-pin; D-sub), or USB 3.2 Gen 2
Type-A, or HDMI 2.0

I/O Interface

Tablet

5MP webcam x 1ⁱⁱ
8MP auto focus rear camera x 1
Audio in/out combo x 1
Optional: DC in Jack x 1^{xvii}
Optional: MicroSD
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 2
LAN (RJ45) x 1
Docking connector x 2
Dual SIM (Micro-SIM 3FF and e-SIM)ⁱⁱⁱ
Optional: Windows Hello face-authentication 5MP camera
(front-facing)ⁱⁱ
RF antenna pass-through for GPS, WWAN and WLAN

Optional keyboard dock:

USB-C charging port x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-A x 3
LAN (RJ45) x 1
HDMI 2.0 x 1
Display port 1.2 x 1
Serial port (9-pin; D-sub) x 1
RF antenna pass-through for GPS, WWAN and WLAN

Communication Interface

10/100/1000 base-T Ethernet
Intel® WiFi 6E AX211, 802.11ax
Bluetooth (v5.3)^{iv}
Optional: Dedicated GPS with L1/L5
Optional: 4G LTE mobile broadband with integrated GPS^{iii, v}
Optional: 5G Sub-6 with integrated L1/L5 GPS^{iii, v}
Optional: Dual SIM (Micro-SIM 3FF and e-SIM)ⁱⁱⁱ

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Smart card reader or HF RFID reader or
Fingerprint reader^{vi, vii}
Optional: Windows Hello face-authentication
5M camera (front-facing)ⁱ
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC)^{xvi}
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)^{xvi}
Li-ion battery
(11.1V, typical 2100mAh; min. 2040mAh) x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery
(14.4V, typical 3450mAh; min. 3300mAh) x 2

Dimension (W x D x H) & Weight

Tablet

329.5 x 238 x 24mm (12.97" x 9.37" x 0.94")
1.7kg (3.75lbs)^{viii}

Tablet + Optional keyboard dock:

340.5 x 327.5 x 47mm (13.40" x 12.89" x 1.85")
3.13kg (6.9lbs)^{viii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration 8 & 6ft (1.8m) drop-resistant^{ix}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^x

Environmental Specification

Temperature^{xi}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^{xii}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xiii}

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:

Carry bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
High capacity Li-ion battery
(14.4V, typical 3450mAh; min. 3300mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Vehicle cradle^{xiv, xv}
Keyboard dock
Vehicle dock^{xiv, xv}
Office dock^{xv}
Spare SSD kit
Getac rugged keyboard

K120 FULLY RUGGED TABLET

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

- I. Units equipped with dual channel memory come with Intel® Iris® X^e Graphics.
- II. 5M webcam and optional Windows Hello face-authentication 5M camera (front-facing) are mutually exclusive options.
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. 4G LTE only available in USA, UK, EU, Australia and New Zealand. 5G Sub-6 only available in USA, UK and EU.
- VI. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VII. Smart card reader, HF RFID reader and Fingerprint scanner are mutually exclusive options.
- VIII. Weight and dimensions vary from configurations and optional accessories; optional high capacity batteries add approx. 11mm (H), 0.20kg.
- IX. Drop test results vary from configurations and optional accessories.
- X. Available with limited configurations and environment conditions.
- XI. Tested by an independent third-party test lab following MIL-STD-810H.
- XII. Available when barcode reader option is selected.
- XIII. Models require either embedded or standalone GPS module.
- XIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XV. Available for laptop and tablet mode.
- XVI. The DC in Jack option comes with a 65W AC Adapter in the box, instead of a USB-C AC Adapter.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

| | Vehicle Dock for Tablet Mode | Vehicle Dock for Laptop Mode | Office Dock for Tablet Mode | Office Dock for Laptop Mode |
|----------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Serial Port | 1 | 1 | 1 | 1 |
| External VGA | 1 | 1 | 1 | 1 |
| Microphone | - | - | 1 | 1 |
| Audio Output | - | - | 1 | 1 |
| DC in Jack | 1 | 1 | 1 | 1 |
| USB | USB 2.0 x 3 USB 3.2 Gen 1 x 3 | USB 2.0 x 3 USB 3.2 Gen 1 x 3 | USB 2.0 x 2 USB 3.2 Gen 1 x 3 | USB 2.0 x 2 USB 3.2 Gen 1 x 3 |
| LAN | 2 | 2 | 2 | 2 |
| HDMI 2.0 | 1 | 1 | 1 | 1 |
| RF Antenna Connector | 3 (WWAN, WLAN, GPS) | 3 (WWAN, WLAN, GPS) | - | - |
| Kensington Lock | 1 | 1 | 1 | 1 |

Getac



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.