


ZX80 FULLY RUGGED TABLET



- Processore Qualcomm® QCS6490, Octa-core
- Display LumiBond da 8" con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits) e touchscreen capacitivo utilizzabile con i guanti
- Batteria hot swap per un funzionamento ininterrotto sul campo
- Certificato per cadute fino a 1,8 metri (6ft), MIL-STD-810H e IP67
- Diverse configurazioni con strumenti di gestione di livello aziendale in un formato sottile e leggero
- Verificato come Android enterprise recommended ⁱ



ZX80 3D demo

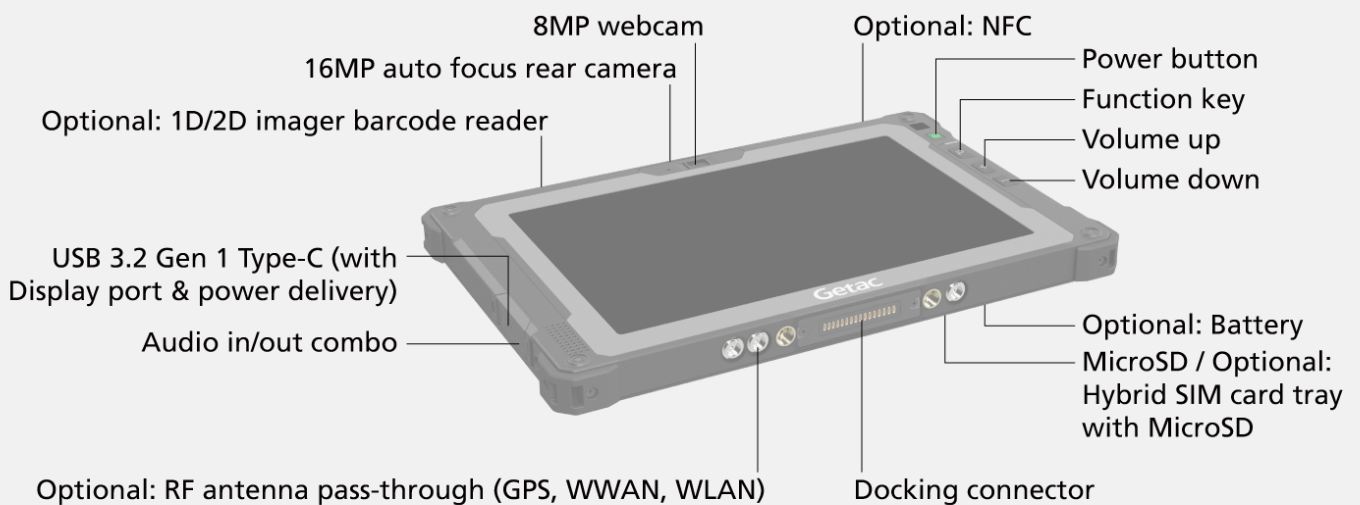

SPECIFICATIONS

Generation

G1

Operating System

Android™ 13.0ⁱ

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

Graphics

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor, up to 13 TOPS with 6th Qualcomm AI Engine

Display

8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)

Protection film

1,000 nits LumiBond display with Getac sunlight readable technology

Capacitive multi-touch screen

Storage & Memory

12GB LPDDR5, 256GB UFS

Keyboard

Power button

3 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen

(multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader

Optional: NFCⁱⁱ

I/O Interface

8MP webcam x 1

16MP auto focus rear camera x 1

Audio in/out combo x 1

USB 3.2 Gen 1 Type-C (with Display port & power delivery) x 1

MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 4FF)

tray with MicroSD x 1ⁱⁱⁱ

Docking connector x 1

Optional: RF antenna pass-through for GPS,

WWAN and WLAN

Communication Interface

Wi-Fi 6E 802.11ax

Bluetooth (v5.2)^{iv}

Optional: Dual SIM (Nano-SIM 2FF and e-SIM)ⁱⁱⁱ

Optional: 4G LTE mobile broadbandⁱⁱⁱ

Optional: 5G Sub-6ⁱⁱⁱ

Optional: Dedicate GPS^v

Security Feature

Optional: NFCⁱⁱ

Power

Internal battery (3.86V, typical 4060mAh; min. 3950mAh)

LifeSupport battery swappable technology

Swappable Battery Options:

Battery bay cover (Default)

Battery (3.84V, typical 4990mAh; min. 4870mAh)

High capacity Li-ion battery

(3.84V, typical 9980mAh; min. 9470mAh)

Dimension (W x D x H) & Weight

234 x 149.8 x 17.6mm (9.21" x 5.89" x 0.69")

590g (1.3lbs)^{vi}

Rugged Feature

MIL-STD-810H certified

IP67 certified

Vibration & 6ft (1.8m) drop resistant^{vii}

Optional: ANSI/UL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D)^{viii}

Environmental Specification

Temperature^{ix}:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac settings and Google applications (Search, Chrome,

Gmail, Maps, YouTube, Play, Drive, YouTube music,

Google TV, Meet and photos)

Getac Log Tool

Getac Diagnostic

Getac Monitoring (trial version) agent/SDK

Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility

Getac Monitoring

Getac Management

Getac OEMConfig

Accessories

Optional:

Carry bag

Battery (3.84V, typical 4990mAh; min. 4870mAh)

High capacity Li-ion battery

(3.84V, typical 9980mAh; min. 9470mAh)

DC-DC vehicle adapter (65W, 11-32VDC)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

Digitizer pen with tether

Capacitive stylus with tether

Protection film

Hand strap with stylus holder

Rotating hand strap with kickstand

Shoulder strap (2-point)

Vehicle cradle^x

Vehicle dock^x

Office dock

65W USB-C AC Adapter

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi

e causare costosi tempi di inattività. Ecco perché Getac ha

introdotto la copertura dei danni accidentali come standard

della garanzia Bumper-to-Bumper, consentendo una migliore

gestione dei costi legati all'IT. Bumper-to-Bumper è

la garanzia senza problemi. Questo significa che potete

contare su di noi affinché il vostro dispositivo sia

nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

ZX80 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Gamber-Johnson vehicle dock and cradle are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock (Gamber-Johnson)	Vehicle Dock (RAM Mounts)
Serial Port	1	-
Audio In/Out Combo	-	-
DC in Jack	-	-
USB	USB 2.0 x 2	USB 2.0 x 2
LAN	1	1
HDMI	-	-
RF Antenna Connector	3 (option) (WWAN, WLAN, GPS)	-
Kensington Lock	-	-

Getac



Getac USA

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.