




## T800 FULLY RUGGED TABLET

- 8.1" HD LumiBond® display for better viewing experience
- Getac proprietary SnapBack add-on featuring smart card and contactless RFID reader combo or 2<sup>nd</sup> expanded battery
- Choice of 1D/2D imager barcode reader, Serial port and LAN port (RJ45)
- MIL-STD-810H and IP65 certified
- Enhanced enterprise security with TPM2.0, Windows disk encryption

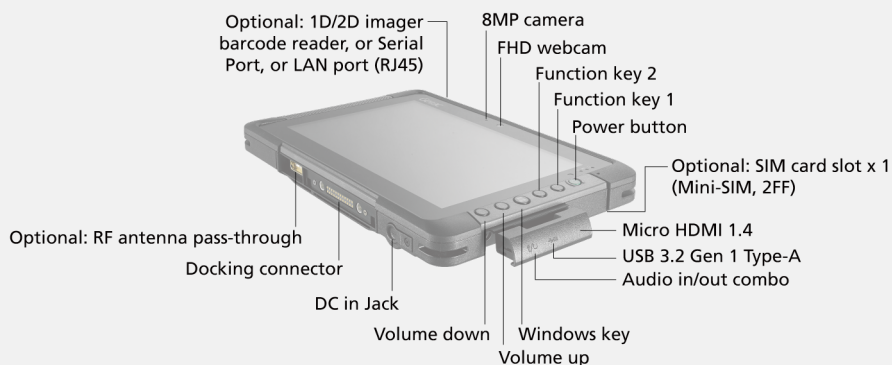

# T800 FULLY RUGGED TABLET

## SPECIFICATIONS

<b>Operating System</b>	Windows 10 Pro
<b>Mobile Computing Platform</b>	Intel® Atom Processor x7-Z8750 1.6GHz, burst up to 2.56GHz - 2MB Cache
<b>VGA Controller</b>	Intel® HD Graphics
<b>Display</b>	8.1" IPS TFT LCD WXGA (1280 x 800) Protection film 600 nits LumiBond® display with Getac sunlight readable technology
<b>Storage &amp; Memory</b>	4GB LPDDR3 Optional: 8GB LPDDR3 128GB eMMC Optional: 256GB eMMC
<b>Keyboard</b>	Power button 5 tablet programmable buttons
<b>Pointing Device</b>	Touchscreen - Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer)
<b>Expansion Slots</b>	Optional: 1D/2D imager barcode reader, Serial port, Ethernet <sup>i</sup> Optional: SnapBack add-on: Smart card and HF RFID/NFC reader combo <sup>ii</sup> Optional: SnapBack add-on: 2 <sup>nd</sup> expanded battery <sup>ii</sup> Optional: SnapBack add-on: Smart card and magnetic stripe reader <sup>ii</sup>
<b>I/O Interface</b>	FHD webcam x 1 8M pixels auto focus rear camera x 1 Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-A x 1 Micro HDMI 1.4 x 1 Docking connector x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) Optional: RF antenna pass-through for GPS, WWAN and WLAN

# T800 FULLY RUGGED TABLET

<b>Communication Interface</b>	Intel® Wi-Fi 6 AX200, 802.11ax Bluetooth (v5.2) <sup>iii</sup> Optional: Dedicated GPS Optional: 4G LTE mobile broadband <sup>iv</sup> Optional: 10/100/1000 base-T Ethernet (Occupies expansion slot)
<b>Security Features</b>	TPM 2.0 Optional: SnapBack add-on: Smart card and HF RFID/NFC combo reader <sup>v</sup> Optional: SnapBack add-on: Smart card and magnetic stripe reader
<b>Power</b>	AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (7.4V, typical 4200mAh; min. 4080mAh) LifeSupport™ battery swappable technology (only with SnapBack 2 <sup>nd</sup> expanded battery)
<b>Dimension (W x D x H) &amp; Weight</b>	227 x 151 x 24 mm (8.93" x 5.94" x 0.94") 0.88kg (1.94 lbs) <sup>vi</sup>
<b>Rugged Features</b>	MIL-STD-810H certified IP65 certified MIL-STD-461G certified Vibration & 6ft (1.8m) drop resistant <sup>vii</sup> Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) <sup>viii</sup>
<b>Environmental Specifications</b>	Temperature <sup>ix</sup> : - Operating: -21°C to 50°C / -6°F to 122°F - Storage: -51°C to 71°C / -60°F to 160°F Humidity: - 95% RH , non-condensing
<b>Pre-installed software</b>	Getac Utility Getac Camera Getac Barcode Manager <sup>x</sup> Optional: Absolute Persistence®
<b>Optional software</b>	Getac Driving Safety Utility Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility <sup>xi</sup>

# T800 FULLY RUGGED TABLET

## Accessories

Battery (7.4V, typical 4200mAh; min. 4080mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

### Optional:

Carry bag  
Battery (7.4V, typical 4200mAh; min. 4080mAh)  
2<sup>nd</sup> expanded battery (14.4V, 2100mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay expanded battery dock with adapter (Six-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC)  
Office dock AC adapter (90W, 100-240VAC)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Digitizer pen  
Capacitive stylus with tether  
Protection film  
Hand strap  
Shoulder strap (2-point)  
Wrist strap  
Vehicle cradle <sup>xii</sup>  
Vehicle dock <sup>xii</sup>  
Office dock

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

- I. 1D/2D imager barcode reader, Serial port, and Ethernet, are mutually exclusive options.
- II. All snapBack add-ons are mutually exclusive options.
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Units with 4G LTE option comes with an embedded SIM card slot.
- V. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.
- XII. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

# T800 FULLY RUGGED TABLET

	Vehicle Dock	Office Dock
Serial Port	1	-
External VGA	-	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	2	4
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

## GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,  
Nangang Dist., Taipei City, 115018, Taiwan, R.O.C.  
Tel : +886 2 2785 7888

[globalmarketing@getac.com](mailto:globalmarketing@getac.com) | [www.getac.com](http://www.getac.com)

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.